


TITAN CLOCKS

Ana-Digi Table Clocks' Operating Manual

①

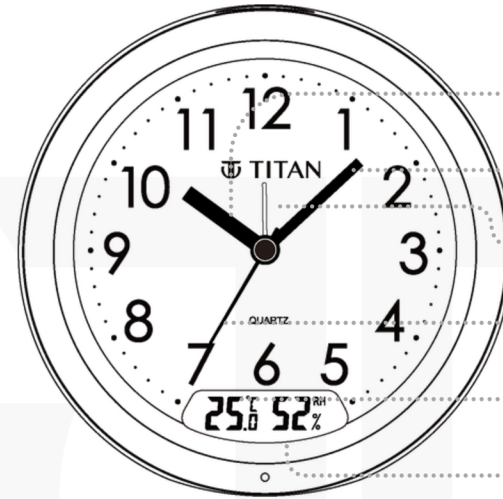

Light/Snooze
Button

Hour Hand


Minute Hand

Alarm Hand

Seconds Hand

Temp. Display

Humidity Display

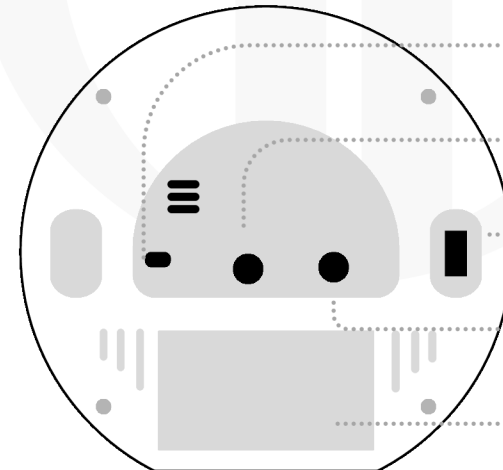

Alarm ON/OFF

Alarm Knob

Auto Light Switch

Time Knob

Battery

2

Functions

1. Light and Snooze Function
2. Snooze Function: 5 minutes
3. Alarm Function
4. LED Backlight: Works for 5 seconds
5. Light-controlled
6. Temperature Range: $-19.9\text{ }^{\circ}\text{C} \sim +50\text{ }^{\circ}\text{C}$. Accuracy $\pm 2\text{ }^{\circ}\text{C}$
7. Humidity Range: 10%-95%, Accuracy is $\pm 10\text{ Rh}$

Operating Instructions

1. Time & alarm setting

- Rotate the time knob on the backside to adjust the time.
- Rotate the Alarm Knob on the backside to set the alarm time
- Push the switch ON to activate the alarm
- Push the switch OFF to deactivate the alarm

2. Light-controlled

- When the switch is in the ON position, it is in light control mode. The backlight is always on in a dark environment.
- When the switch is in the OFF position, it is out of light control mode, and the backlight is not on.

3

3. Snooze/light

- When the alarm sounds, press the Snooze/Light button on top. It will enter snooze mode, and the alarm will sound again after 5 minutes.

4. Special mark:


- The alarm sound is “B..B.. B...”, it gets louder and faster.

TITAN CLOCKS


Digital Clocks' Operating Manual

①

Light/Snooze Temp. Display Humidity Display

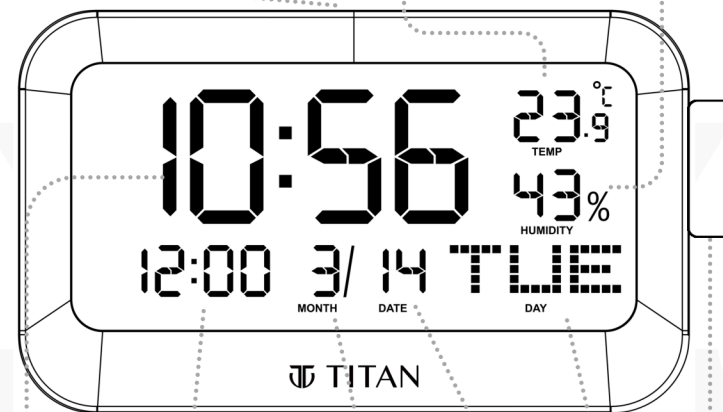

Time Alarm time Month Date Day Set

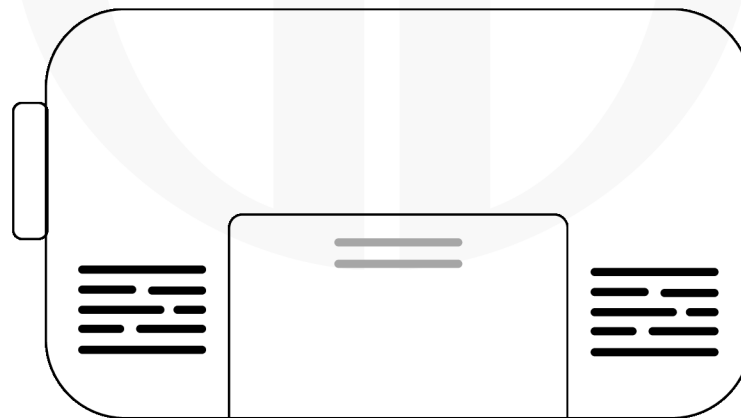

2

Functions

1. Two keys: SET, Touch SNOOZE / LIGHT
2. Show hour, minute, year(hidden), alarm time, month, date, week, temperature, and humidity
3. Calendar:2000-2099
4. 12/24 hour available
5. 3 sets alarm per day
6. Temperature: range -10°C - $+50^{\circ}\text{C}$, accuracy $\pm 2^{\circ}\text{C}$
7. Humidity:range 20%-95%,accuracy $\pm 10\%$
8. Snooze function: 5 minutes
9. LED backlight: work for 5 seconds

Operating Instructions

A. Time setting:

- In normal display mode, press SET, and the YEAR will flash; rotate the SET button to set it. After setting the year, press SET again to set the month. Follow this step to set the date, 12/24, hour, and minute.
- Exit the setting mode automatically if you do not press the button within 30 seconds.
- If the Alarm is not required and is to be turned OFF, rotate the SET button counter-clockwise once and press the SET button once; the alarm Indicator will blink. Automatically, after 30 seconds, the alarm will turn OFF

3

B. Alarm setting:

- In the standard display, rotate the SET button down to locate Alarm 1 with time flashing. Press SET to toggle ON/OFF. Hold SET for 2 seconds to edit; HOUR flashes first. Rotate to adjust. Press SET to move to MINUTE; rotate to set the time. The system auto-exits after 30 seconds of inactivity.
- In the standard display, rotate the SET button down twice, you will find the alarm 2 symbol and time flash, alarm setting is the same as alarm 1
- In the standard display, rotate the SET button down three times, you will find the alarm 3 symbol and time flash, alarm setting is the same as alarm 1
- A flashing alarm symbol signals the alarm is approaching.
- When the alarm sounds, press "SNOOZE / LIGHT" to enter snooze mode for 5 minutes.
- The alarm sound is "B..B.. B...", it gets louder and faster.
- In Snooze mode. Alarm Indicator with Snooze 'Zz' indicator
- To snooze OFF, rotate the SET button counterclockwise once
- When the alarm sounds, rotate/press the SET button once to turn the alarm off.

C. Temperature change:

The temperature display can switch between Fahrenheit and Celsius. Rotate the SET button up to change it.